




CRITICAL DETAIL: ROOF REPAIR: SHINGLES


ENERGY + HEALTH PROGRAM

1. Locate cracked, torn, curled, cupped and/or pitted shingles. Locate places where shingles are missing.
2. Carefully pry damaged shingle with a flat bar.
3. Apply roof sealing compound to the underside of the new shingle.
4. Slide the new shingle into place.


✓ LOCATE REPAIRS

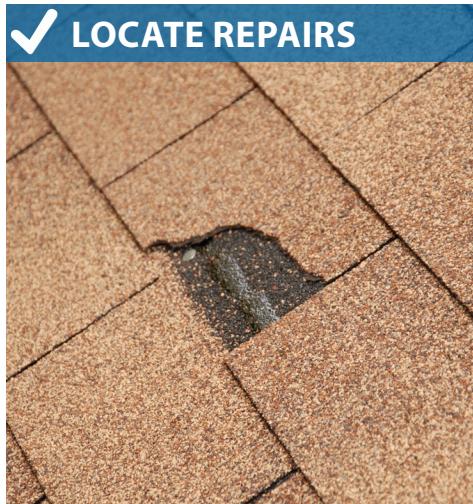

✓ REMOVE SHINGLE

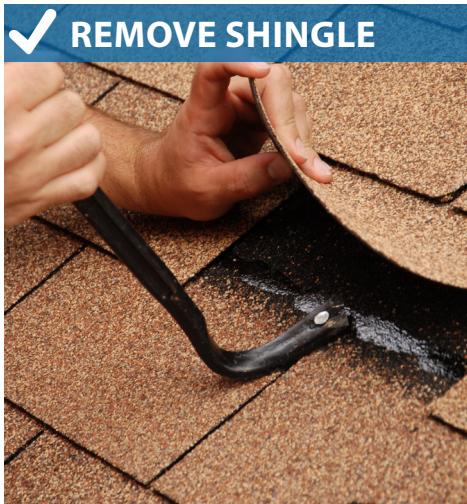

✓ APPLY SEAL

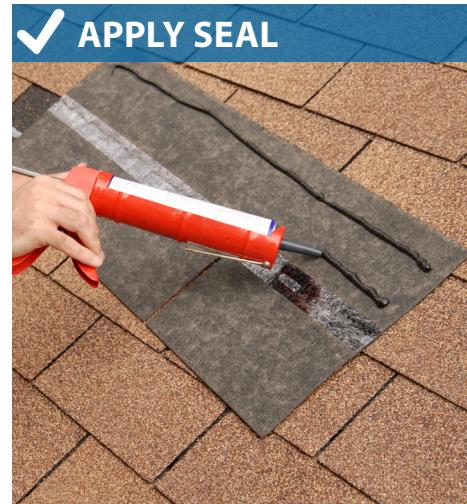

✓ INSTALL SHINGLE

